
COFFEE CART


REVISED LAYOUT + SERVING LEDGE

CONCEPT BLUEPRINT | 12 in outward serving ledge | Revision D | 27 OCT 2026

01 / TOP VIEW

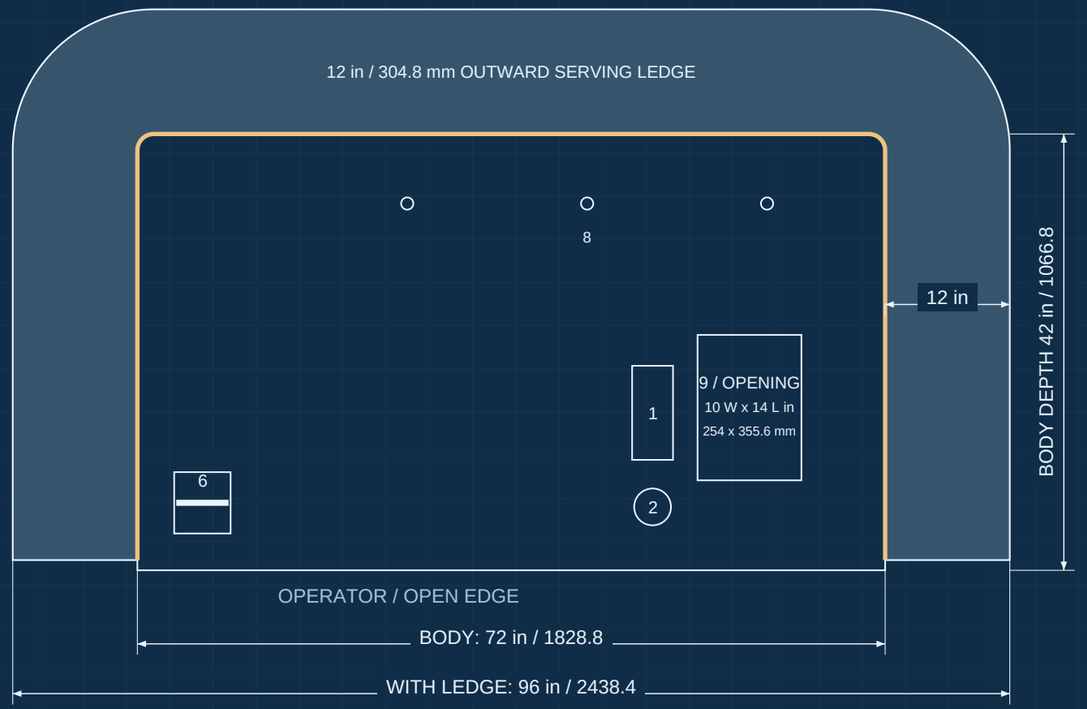

02 / OPERATOR ELEVATION

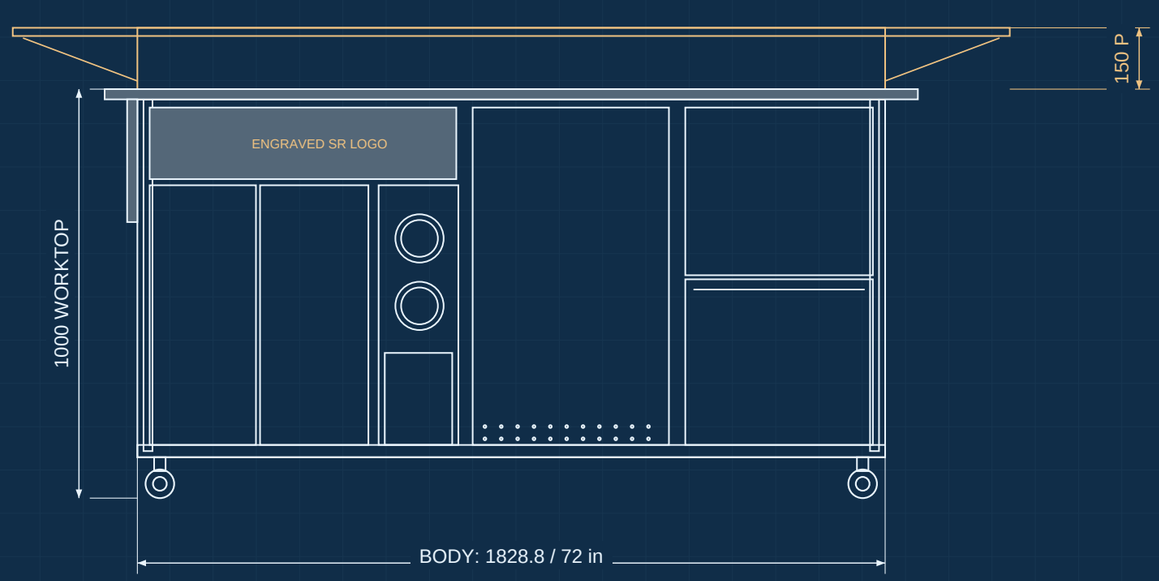

REVISION D / YOUR CHANGES

Features 4 and 5 removed; 3 and 7 stay removed.

Feature 9 is an EMPTY DROP-IN OPENING.

No basin, sink bottom, drain or faucet is supplied.

10 W x 14 L in opening: side-to-side x front-to-back.

New ledge projects 12 in / 304.8 mm OUTWARD along the rear AND both full side guards.

CURRENT TOP FEATURES

1 Rectangular tool well beside the opening.

2 Round tool well beside the opening.

6 Knockbox at operator-front-left corner.
Opening 138 L x 150 W mm, with knock bar.

8 Rear service / parasol holes.

9 Drop-in sink cutout, no installed sink.
10 W x 14 L in / 254 x 355.6 mm.

RETAINED SIZE / PROPOSED HEIGHTS

Body remains 6 ft L x 3.5 ft D / 72 x 42 in.

Exact body: 1828.8 L x 1066.8 D mm.

Worktop height retained: 1000 mm including casters.

Guard height retained P: 150 mm above worktop.

Serving top at guard top P: 1150 mm from floor.

Folding left shelf shown stowed below new ledge.

Updated SR logo: white rear LED + front wood engraving.

Rear LED max 900 W x 700 H; centre height 600 mm P.

Amber + P indicates proposed construction details.

Confirm actual sink template and LED wiring / driver.

COFFEE CART


LEDGE + DROP-IN OPENING DETAILS

CONCEPT BLUEPRINT | 12 in outward serving ledge | Revision D | 27 OCT 2026

03 / CUSTOMER REAR



04 / RIGHT END + OUTWARD LEDGE

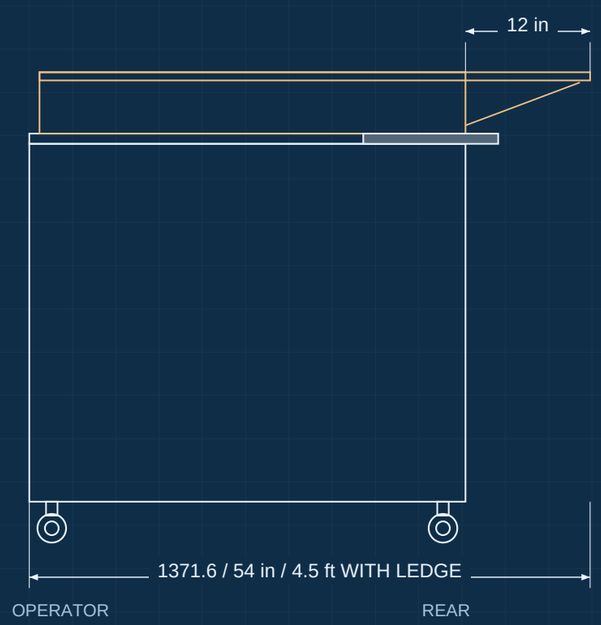

05 / FEATURE 9 - CUTOUT ONLY



X: 254 W / side-to-side; Y: 355.6 L / front-to-back.

Cutout only. Verify actual sink template; no bowl depth.

CUTOUT LOCATIONS / RETAINED

Origin: operator-front-left of MAIN BODY.

X runs right; Y runs toward the customer rear.

Offsets below are proposed. Sizes in mm.

6	Knockbox	90, 90	138 x 150
1	Tool well	1210, 270	100 x 230 P
9	Opening	1370, 220	254 x 355.6

2 Round well center: X=1260, Y=155; diameter 90 P.

8 Hole centers: X=660 / 1100 / 1540; Y=896.8 P.

Feature 9 has no built-in bowl depth or drain.

SERVING LEDGE / THREE SIDES

Horizontal stainless ledge: 12 in / 304.8 deep.

Faces OUTWARD from rear and both end guards.

No serving ledge across the operator edge.

Guard lines moved to body perimeter for full 12 in projection beyond the body; rounded rear corners.

Serving top 1150 high P; folded edge/supports TBD.

Small walnut rail retained below at worktop height.

BODY + NEW OVERALL ENVELOPE

Body: 1828.8 L x 1066.8 D x 1000 H mm.

With serving ledge: 2438.4 L x 1371.6 D mm.

Overall footprint: 8 ft L x 4.5 ft D / 96 x 54 in.

Overall height P: 1150 mm to serving surface.

Updated SR logo: rear LED and engraved front walnut.

FABRICATION DETAILS TO CONFIRM

Source metal options: 201 / 304; 1.2 / 2.0 / 3.0 mm.

Verify your sink cutout template, flange and clearances.


Ledge brackets, welds, load rating, frame and caster stability require fabrication design; not calculated here.

COFFEE CART

SHARED-MODEL VIEWS / CURRENT DESIGN

CONCEPT BLUEPRINT | 12 in outward serving ledge | Revision D | 27 OCT 2026

STUDIO ROAST / REVISION D / mm

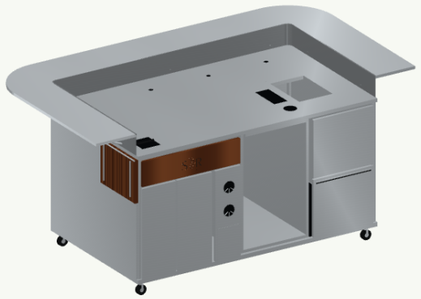

Design reference · Final shop drawings and proposed dimensions require confirmation

01 / PERSPECTIVE

STUDIO ROAST / REVISION D / mm



Design reference · Final shop drawings and proposed dimensions require confirmation

02 / OPERATOR


STUDIO ROAST / REVISION D / mm



Design reference · Final shop drawings and proposed dimensions require confirmation

03 / CUSTOMER REAR


STUDIO ROAST / REVISION D / mm



Design reference · Final shop drawings and proposed dimensions require confirmation

04 / LEFT END

STUDIO ROAST / REVISION D / mm



Design reference · Final shop drawings and proposed dimensions require confirmation

05 / RIGHT END

STUDIO ROAST / REVISION D / mm



Design reference · Final shop drawings and proposed dimensions require confirmation

06 / TOP / CORRECTED SINK

COFFEE CART

UPDATED LOGO / REAR LED + WALNUT ENGRAVING

CONCEPT BLUEPRINT | 12 in outward serving ledge | Revision D | 27 OCT 2026

CUSTOMER REAR / WHITE LED



OPERATOR WALNUT / ENGRAVED LOGO DETAIL



UPDATED OWNER-SUPPLIED ARTWORK

Use the SR monogram with central coffee branch

and STUDIO ROAST name, matching the new logo.

Original logo JPEG is included with the website.

Preserve proportions and fine botanical details.

REAR / WHITE LED LOGO

Fit artwork within 900 W x 700 H mm max P.

Proposed centre elevation: 600 mm above floor.

Confirm size, standoffs, minimum LED stroke width,

low-voltage driver, concealed wiring and access.

OPERATOR / WALNUT ENGRAVING

Engrave the logo directly into existing walnut fascia.

Proposed maximum artwork area: 210 W x 145 H.

Centre on the 750 W x 175 H mm wood panel P.

Confirm depth, fine-line detail, size and clear finish.

Rendering illustrates recessed dark engraving.

REVISION D / KEY CHANGES

English-only guide; millimetres are primary.

Sink: X=254 W; Y=355.6 L. Verify actual template.

New logo replaces the previous cursive artwork.

U-shaped ledge stays open at operator front.

Features 3, 4, 5 and 7 remain removed.